



Vehicle Camera Monitor System



GUANGZHOU BESYO AUTO PARTS CO., LTD

2023/2024

Guangzhou Besyo Auto Parts Co., Ltd is specialized in the development, production, sales and service of camera and monitor systems for agricultural machinery, heavy vehicles, and forklift etc with over 10 years of experience.

Besyo relying on advanced technology, R&D ability, high-grade materials, with strict ISO management system, our products passed many strict tests and certificates, and selling well in all over the world.

The certificates include CE, EMC, Rohs, E9, IP69K, Patents.



R10

IP69K

We do our best to provide safety series products of reliable quality and highly competitive price to our customers, to realise win-win cooperation .



E9 rearview monitor system



E9 camera



CE monitor camera system



CE wireless camera system



Rohs wireless camera system



E9 wireless camera system



IP69K camera



ISO9001:2015

AI monitor & AI camera

NEW



BLIND AREA ALARM, SURVEILLANCE & RECORDING ALL-IN-ONE MONITOR

AI monitor:

- Screen size: 7 inch (16:9)
- Resolution: 1024(H) × RGB × 600(V)
- Working voltage: DC 12V ~ 24V
- Brightness: 450cd/m² 500:1
- System: 4QUAD AHD 720P/PAL

- Signal interface: AV1/AV2/AV3/AV4
- SD card: Support Max. 128G
- Max. distance for blind area alarm: 6M
- Working temperature: -20°C ~ +70°C
- Storage temperature: -30°C ~ +80°C

AHD

720P/1080P



AI monitor with AHD camera,
Monitor built-in AI function

BY-08477MQ (AI)



BY-08477MQS (AI)

SMART BSD REAL-TIME PEDESTRIAN & VEHICLE BLIND AREA MONITORING WARNING CAMERA

AI camera:

- Resolution: 720P
- Power Supply: DC 12V
- Viewing Angle: 130°
- Waterproof rating: IP69K
- Audio: Yes
- Pixel Size: 3.75 μm x 3.75 μm
- Working temperature: -20°C ~ +70°C
- Storage temperature: -30°C ~ +80°C



AI camera with AHD monitor,
Camera built-in AI function

BY-02032 (AI)
AHD 720P



Wired connection



Working Temperature



Audio



Shockproof



12-24V



BY-08477MS
(AI camera)

AHD Digital wireless camera system

NEW



AHD 2QUAD monitor:

- AHD 2QUAD monitor:
- Resolution: 1024(H) × RGB × 600(V)
- Contrast: 450cd/m² / 500:1
- Working volt: DC12V/24V
- Video input: 2 videos, 1 audio
- SD card: support Max.128G
- Video storage format: MP4
- Working temperature: -20°C → +70°C
- Storage temperature: -40°C → +80°C
- Transmission distance: 500M in open area

AHD camera:

- AHD camera:
- Sensor: AHD 720P
- Resolution: 1920 × 720
- Waterproof range: IP69K
- Working volt: DC12/24V
- Level angle: 120°
- Night vision distance: >15m
- Working temperature: -20°C → +70°C
- Storage temperature: -40°C → +80°C
- Transmission distance: 500M in open area



BY-08207WR (with battery)

Camera optional: 1PC 2PCS



Android System

NEW



ANDROID SYSTEM TOUCH MONITOR

- Screen size: 7 inch / 10.1 inch
- Resolution: 1024 × 600
- Display format: 16:9
- Brightness: 500cd/m²
- View angle: 85/85/85/85
- Operating system: Android 8.1
- Chip: 4 core A53 processor, 1.5GHz frequency

- Audio format: MPEG/MP3/WMA...
- Video format: AVI/MKV/MP4/MOV/RMVB.
- Picture format: JPG/BMP/JPEG/GIF.
- Built-in speaker: 8R × 2W
- Power supply :DC 12V-24V
- Operating temperature: -20°C~+75°C
- Storage temperature: -30°C~+80°C



BY-08277M
(Android system)

BY-08104M
(Android system)



Wired connection



Working Temperature



Audio



Shockproof



12-24V

Tablet monitor with touch button

NEW



Specification

- Aspect ratio 16:9 image
- Resolution: 800(H) × RGB × 480(V)
- Power supply: DC12~24V
- Video inputs: 2/3/4 videos, 1 audio optional
- System: PAL & NTSC auto-switching
- OSD menu, remote controller
- Multi-languages display
- Automatically adjust light sensor
- Operating temperature: -20°C ~ +70°C
- Storage temperature: -30°C ~ +80°C



BY-08277M



BY-08277MQ



BY-08277MS



BY-08104M



BY-08104MQ



AHD tablet wireless monitor camera system

NEW



AHD tablet wireless monitor:

- Touch button: Yes
- DVR function: Yes
- Contrast: 500:1
- Brightness: 450cd/m²
- Resolution: 1024(H) × 600(V)
- Working voltage: DC12V/24V
- Video inputs: 4 videos, 1 audio
- Transmitting distance: 150M in open area

AHD wireless camera:

- Resolution: AHD 720P/1080P
- View angle: 120°
- Night vision distance: > 10m
- Waterproof rating: IP69K
- Built-in rechargeable battery
- Battery charging voltage: 12V/1.5A
- Battery capacity: 3.7V/7800mAh
- Charging time: 12V/4.5H



BY-08277WR

Camera optional: 1PC



BY-08277WR (4QUAD)

Camera optional: 1PC 2PCS 3PCS 4PCS



BY-08104WR

Camera optional: 1PC



BY-08104WR (4QUAD)

Camera optional: 1PC 2PCS 3PCS 4PCS



2.4G Digital Wireless Monitor Camera System

NEW



2.4G MULTI-MONITOR WITH 1PC WIRELESS CAMERA




Multi-Monitor-System

- Multi-monitor with digital wireless camera system. Apply to farm harvester harvesting, tractor transport, viewing silos.
- 7" Digital monitor built-in 2.4GHz digital wireless receiver, graphical menu.
- Multi-monitor automatically receives the same camera image.
- Picture image may be adjusted for horizontal, vertical, mirror and normal viewing.
- 2.4GHz digital wireless camera: IP69K waterproof and 10G vibration, IR LEDs for night vision.
- Operating voltage: DC12~24V.



BY-08118WR

Monitor optional: 1PC/2PCS/3PCS/4PCS

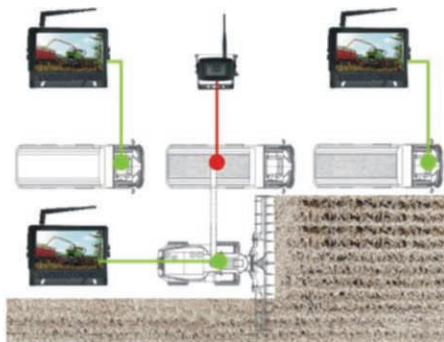


360 3D Camera System

NEW



360 3DCAMERA SYSTEM

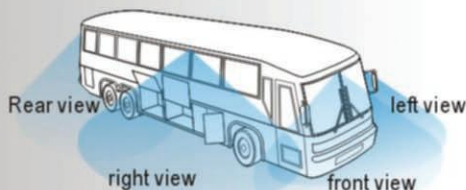

BY-02065



360°
Birds-eye view



Supports
Up to 4 AHD cameras



Make manoeuvres
Safer & easier



Tailored
Screen setup

SEAMLESS 360° BIRD'S-EYE VIEW OF YOUR VEHICLE & THE AREA AROUND IT

- 360° view monitor system provides high resolution images captured on 4 AHD cameras
- Visually identify obstacles in all directions of vehicle-covering blind spots
- User-tailored screen setup such as split screen output to display specific cameras when reversing or indication
- The plug-and-play system will connect into Besyo DVRs to allow the recording of images from all cameras

FEATURES

12/24V
Waterproof to IP69K
Real-time 360° view
4 AHD cameras with ultra-wide angle support with GPS module, ECU

BENEFITS

Comprehensive view of the surrounding area in a single image
Eliminates blind spots, improves safety
Helps reduce risk of collisions
Danger area are identified and prioritised on the display



Wired connection



Working Temperature



Audio



Shockproof



12-24V

Free Work Camera

NEW



Specification

- Rechargeable battery pack
- Battery capacity: 7800mAh
- Charging time: 4~6H
- Discharging time: 8~10H
- Charging current: 2A

- Input voltage: 6~32V
- Output voltage: 12V
- Charging temperature: -20~+45°C
- Storage temperature: -20~+60°C
- Waterproof rating: IP65

- Dimension: 107×80×36.5(mm)
- Weight: 400g
- Mounting: magnetic mount
- Connection: DC for cigarette connection



BY-02003R



1. Supply power to camera and working 8~10 hours continuously .
2. Camera can be rotated 360° for suitable angle when fixed on the pole of rechargeable battery pack.
3. Strong magnet base for use easily and conveniently.

Wireless



BY-02068W



2.4G Wireless Monitor & Free Work Camera

NEW



- Screen size: digital screen (16:9 & 4:3)
- System: PAL/NTSC(auto)
- Resolution: 800(H)×RGB×480(V)
- Video inputs: 2 videos, 1 audio
- Brightness: 450cd/M² 450:1
- Operating temperature: -20°C~+70°C
- Working voltage: DC12V~32V

- Feature: 2.4G HZ digital wireless receiver
- Effective distance: > 150M
- With removable sunvisor
- Camera: CMOS camera
- DC12V~DC24V
- Function: 2.4G HZ digital wireless transmitter camera
- Feature: waterproof, shockproof, night vision



2.4G DIGITAL 2 QUAD WIRELESS CAMERA SYSTEMS



BY-08517 WR (Battery)

Camera optional: 1PC 2PCS



BY-08147WR (Battery)

Camera optional: 1PC 2PCS



Wireless Camera with Wireless Receiver

NEW



Specification

CMOS wireless camera:

- Max. transmitting distance: 120M
- IP rating: IP69K
- Night vision: Yes
- Camera viewing angle: 120°
- Volts: 12V~24V
- Magnetic fix: Yes
- Bolt fix: Yes
- Temperature range: -20°C ~ 60°C

2.4Ghz wireless receiver:


- dBm transmission: 20 dBm
- Transmitting speed: 4 Mbps
- IP rating: IP65
- Volts: 12~24V
- Magnetic fix: Yes
- Bolt fix: Yes
- Temperature range: -20°C ~ 60°C
- Operating frequency: 2400~2483.5Mhz

CMOS

AHD 720P/1080P



*Monitor for reference only,
not included!
(Original monitor)



BY-02072W+BY-08106WR



Installation



Package



2.4G Wireless Monitor & Camera



2.4G DIGITAL 2/4 QUAD WIRELESS CAMERA SYSTEMS

- Screen size: digital screen (16:9 & 4:3)
- System: PAL/NTSC(auto)
- Resolution: 800(H)×RGB×480(V)
- Video inputs: 2 videos, 1 audio
- Brightness: 450cd/M² 450:1
- Operating temperature: -20°C~+70°C
- Working voltage: DC12V~32V

- Feature: 2.4G HZ digital wireless receiver
- Effective distance: >150M
- With removable sunvisor
- Camera: CMOS camera
- DC12V~DC24V
- Function: 2.4G HZ digital wireless transmitter camera
- Feature: waterproof, shockproof, night vision



(2 Quad)

BY-08517WR

Camera Optional: 1PC 2PCS



(2 Quad)

BY-08147WR

Camera Optional: 1PC 2PCS



BY-08101W

BY-08109W

BY-08137W

BY-08517W



2.4G Wireless Monitor & Camera



2.4G DIGITAL 4 QUAD WIRELESS CAMERA SYSTEMS

- Screen size: digital screen (16:9 & 4:3)
- System: PAL/NTSC(auto)
- Resolution: 800(H)×RGB×480(V)
- Video inputs: 4 videos, 1 audio
- Brightness: 450cd/M² 450:1
- Operating temperature: -20°C~+70°C
- Working voltage: DC12V~32V

- Feature: 2.4G HZ digital wireless receiver
- Effective distance: >150M
- With removable sunvisor
- Camera: CMOS camera
- DC12V~DC24V
- Function: 2.4G HZ digital wireless transmitter camera
- Feature: waterproof, shockproof, night vision



(4 Quad)

BY-08109WR


Camera Optional: 1PC 2PCS 3PCS 4PCS



(4 Quad)

BY-08101WR

Camera Optional: 1PC 2PCS 3PCS 4PCS

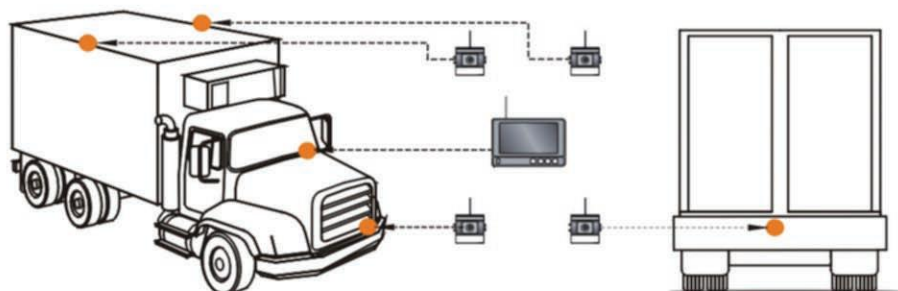

2.4G Digital wireless Monitor with Touch Button



2.4G DIGITAL WIRELESS MONITOR WITH TOUCH BUTTON

Specification:

- Screen size: digital screen (16:9&4:3)
- System: PAL/NTSC(auto)
- Resolution: 800(H)×RGB×480(V)
- Video inputs: 4 videos, 1 audio
- Brightness: 450cd/M² 500:1

- Operating temperature: -20℃ ~ +70℃
- Working voltage: DC12V~24V
- Feature: 2.4G HZ digital wireless receiver
- Effective distance: >150M
- With removable sunvisor



BY-08237WR (4Quad)
Camera Optional: 1PC 2PCS 3PCS 4PCS



BY-08219WR (4Quad)
Camera Optional: 1PC 2PCS 3PCS 4PCS



2.4G Digital wireless Monitor System



2.4G DIGITAL 4 QUAD WIRELESS CAMERA SYSTEM

Specification:

- Screen size: digital screen (16:9&4:3)
- System: PAL/NTSC(auto)
- Resolution: 800(H)×RGB×480(V)
- Video Inputs: 4 videos, 1 audio
- Brightness: 450cd/M² 500:1

- Operating temperature: -20℃ ~ +70℃
- Working voltage: DC12V~24V
- Feature: 2.4G HZ digital wireless receiver
- Effective distance: >150M
- With removable sunvisor



BY-08127WR (4Quad)

Camera Optional: 1PC 2PCS 3PCS 4PCS



BY-08101WR (4Quad)

Camera Optional: 1PC 2PCS 3PCS 4PCS



AHD Digital wireless camera system

NEW



AHD wireless monitor:

- Size: 7 inch (16:9)
- Resolution: 1024(H) × RGB × 600(V)
- Power supply: DC12~32V
- Video inputs: 1 video / 4 videos
- SD card: Support 128G SD card
- Effective distance: ≤ 300M (No obstacle)
- Working temperature: -20°C ~ +70°C

AHD wireless camera:


- Image Device: AHD 720P
- Operation frequency: 2403-2478 MHz
- Volts: 12/24V
- Waterproof rating: IP69K
- Viewing Angle: 120°
- Night vision distance: 15m
- Working temperature: -20°C ~ +70°C



BY-08317WR
(Camera optional: 1PC)



BY-08317WR (4QUAD)
(Camera optional: 1PC 2PCS 3PCS 4PCS)

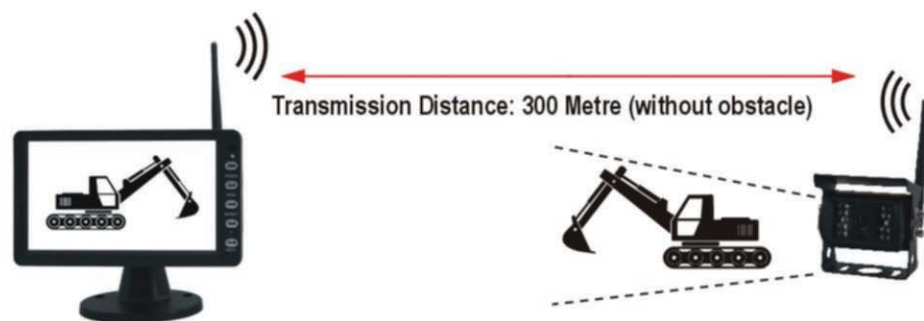

2.4GHz Wireless Camera with Color LCD Monitor

NEW



Specification

Wireless Monitor:

- 4.3 inch/5 inch digital panel
- Aspect ratio:16:9 image
- Resolution:800×RGB×480
- Backlight: LED, 500cd/m² Contrast: 1200:1
- AV input: 1 channel 2.4G wireless video signal input
- Power supply:DC12V~24V

Wireless camera:

- Image sensor: 1/3" CMOS
- Resolution: 600TV Lines
- Waterproof: IP69K
- Lens angle: 120 wide angle
- Power supply: DC12~24V



BY-08512W



BY-08050W



Bayonet bracket
BY-08003G



EU and Global market
BY-02065W-EU



USA type bracket
BY-02065W-U



2.4G Wireless Monitor & Camera



2.4G DIGITAL WIRELESS CAMERA SYSTEMS

- Screen size: digital screen (16:9 & 4:3)
- System: PAL/NTSC(auto)
- Resolution: 800(H)×RGB×480(V)
- Video inputs: 1 video
- Brightness: 450cd/M² 450:1
- Operating temperature: -20°C~+70°C
- Working voltage: DC12V~32V

- Feature: 2.4G HZ digital wireless receiver
- Effective distance: >150M
- With removable sunvisor
- Camera: CMOS camera
- DC12V~DC24V
- Function: 2.4G HZ digital wireless transmitter camera
- Feature: waterproof, shockproof, night vision



BY-08514WR



BY-08107WR



2.4G Forklift wireless camera with laser light

NEW



- Work voltage: DC10~48V
(Rechargeable battery optional)
- Waterproof rate: IP69K
- Shell material: aluminium alloy shell
(Built in 6/8 PCS high strength magnets)
- Image type: high definition, color, CMOS 1/3
- Resolution: 960(H) × 576(V)
- TV line: 700 TVL

- Transmitted power: 20dbm
- Fill light pattern: LED light
- Effective distance: 150M (without obstacle)
- Night vision distance: 3M
- Shockproof rate: 5.9G
- Working temperature: -20°C ~ +70°C
- Storage temperature: -30°C ~ +80°C

CMOS

AHD 720P/1080P

Laser Positioning: Built-in laser positioning line helps the driver to accurately operate the fork, so as to avoid damage to the goods!




BY-02000W

Built in 6 PCS high strength magnets



BY-02001W

Built in 8 PCS high strength magnets and built in battery can work 6 hours

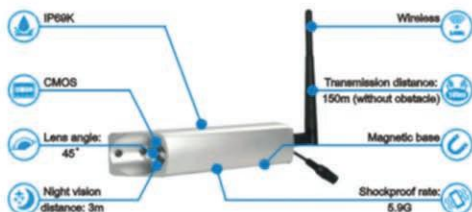

AHD Digital wireless camera system

NEW



CMOS wireless camera:

- Sensor: CMOS
- Resolution: 976(H) × 494(V)
- Waterproof range: IP69K
- Working volt: DC12/24V
- Level angle: 120°
- Night vision distance: > 15m
- Working Temperature: -20°C ~ +70°C
- Storage Temperature: -40°C ~ +80°C
- Transmission distance: 100M in open area

AHD wireless camera:

- Sensor: AHD 720P/1080P
- Resolution: 1920 × 720
- Waterproof range: IP69K
- Working volt: DC12/24V
- Level angle: 120°
- Night vision distance: > 15m
- Working Temperature: -20°C ~ +70°C
- Storage Temperature: -40°C ~ +80°C
- Transmission distance: 100M in open area



BY-02068W



BY-02103W



BY-02063W



BY-02030W



BY-02072W



BY-02031W



Monitor



MONITOR

- Aspect ratio 16:9 image
- Resolution: 800(H)×RGB×480(V)
- 2/3/4 videos, 1 audio optional
- Power supply: DC 12V~24V
- System: PAL & NTSC auto-switching

- OSD menu, remote control
- Multi-languages display
- Automatically adjust light sensor
- Suitable for rear view camera



BY-08513M




BY-08777M



BY-08901M



BY-08101M

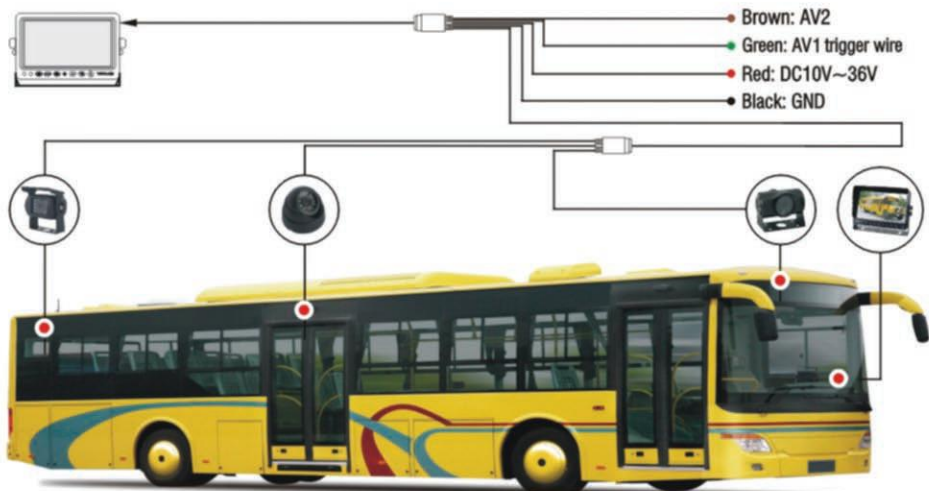

Monitor



5", 7" MONITOR AND CAMERA SYSTEMS

- Aspect ratio 16:9 image
- Resolution: 800(H)×RGB×480 (V)
- 2/3/4 videos, 1 audio optional
- Power supply: DC 12V~24V
- System: PAL & NTSC auto-switching

- OSD menu, remote control
- Multi-languages display
- Automatically adjust light sensor
- Suitable for rear view camera



Remote Control



4PIN Cable



Camera



BY-08513MS



4PIN Connector



9PIN Power Connector




4PIN Cable



Camera



BY-08777MS



Monitor



9", 10.1" 4 QUAD MONITOR AND CAMERA SYSTEMS

- Aspect ratio 16:9 image
- Resolution: 800 (H) × RGB × 480 (V)
- 4 videos, 1 audio optional
- Power supply: DC 12V ~ 24V
- System: PAL & NTSC auto-switching



- OSD menu, remote control
- Multi-languages display
- Automatically adjust light sensor
- Suitable for rear view camera
- 9" dimension: 236 × 158 × 28mm



BY-08901MQ



BY-08101MQS

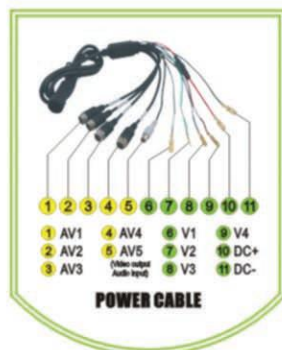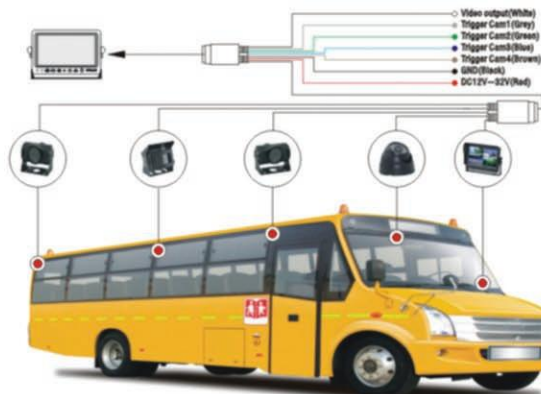

Touch Button Monitor



TOUCH BUTTON MONITOR WITH CAMERA SYSTEM

Specification

- Aspect ratio 16:9 image
- Resolution: 800(H) × RGB × 480(V)
- 2/3/4 videos, 1 audio optional
- Power supply: DC 12V~24V

- System: PAL & NTSC auto-switching
- OSD menu, remote control
- Multi-languages display
- Automatically adjust light sensor
- Suitable for rear view camera



BY-08677MS



BY-08903MQS



BY-08103MQ



BY-08903MQ



BY-08677MQ



BY-08050M



Camera Monitor System

NEW



Specification:

- Aspect ratio 16:9 image
- Resolution: 800(H)×RGB×480(V)
- Power supply: DC12~24V
- Video inputs: 2/3/4 videos, 1 audio optional
- System: PAL & NTSC auto-switching

- OSD menu, remote controller
- Working voltage: DC 12V~32V
- Multi-languages display
- Automatically adjust light sensor
- Operating temperature:-20°C~+70°C



BY-08477M



BY-08477MQ



BY-08477MQS



BY-08102M



BY-08102MQ



BY-08102MQS



Waterproof Monitor



7/10.1 INCH WATERPROOF MONITOR

- 7/10.1 inch TFT panel
- Aspect ratio 16:9 Image
- Resolution: 1024(H)×RGB×600(V)
- 2/3/4 videos
- Power supply: DC 12V~24V
- System: PAL & NTSC auto-switching

- OSD menu: remote control
- Sunshade design around
- Automatically switch to V2 when reversing
- Suitable for rear view camera
- 4 PIN connector (optional) for special camera
- Dimension: 172×115×22mm



BY-08713M



BY-08713MS



BY-08713MQ



BY-08108MQS



BY-08109MQS



Monitor



- 7 inch TFT panel
- Aspect ratio 16:9 image
- Resolution: 800(H) × RGB × 480(V)
- 2/3/4 videos, 1 audio optional
- Power supply: DC 12V~24V
- System: PAL & NTSC auto-switching

- OSD menu: remote control
- Sunshade design around
- Automatically switch to V2 when reversing
- Suitable for rear view camera
- 4 PIN connector (optional) for special camera
- Dimension: 172 × 115 × 22mm



BY-08977M



BY-08977MQ



BY-08977MS



BY-08067M



BY-08067MQ



BY-08067MS



BY-08057M



BY-08057MQ



BY-08057MS



Parking Sensor

NEW



PARKING SENSOR SERIES

CAR, VAN, BUS, TRUCK, ETC

- 7 inch HD display
- BiBi voice warning
- Digital showing the obstacle distance
- Anti vibration and waterproof design, perfect performance under all weather

- Detect distance: 0.5M~5M
- BiBi /human voice optional
- Rated voltage: DC 24V
- Working temperature: -30℃~+70℃
- Working voltage: DC 12V~24V



BY-828 (05)



BY-08047MS (4 Sensors)

Patent Number: ZL 2016 2 1283491.6



BY-08077MS (4 sensors)



Wired connection



Working Temperature



Audio



Shockproof



12-24V

DVR Monitor



7", 9" PANEL WITH DVR RECORDER



- Resolution: 800(H)×RGB×480(V)
- OSD menu function: Chinese and English
- 4 videos, 1 audio optional
- Video formats: M-JPEG
- Brightness/contrast: 400cd/M² 400:1
- Operating temperature: -20°C ~ +70°C
- Operating voltage: DC12V~32V

■ **Features:** AV, photograph, video record function (the recording file stored in SD card, maximum 128G memory, supporting 24 hours continuous recording); Av2/AV3/AV4 with trigger wire, once trigger wire is activated, image automatically switch over to the corresponding camera, and take photo.

■ **Optional:** 4 Audio input optional (Not for record audio, it is for monitor interior power amplifier).



4PIN Connector



20PIN Power Connector



BY-08677 DVR




BY-08902 DVR



C:Bracket



D:Bracket



Wired connection



Working Temperature



Audio



Shockproof



12/24V

4 Cameras Recording MDVR - Harddrive Version

NEW



Specification:

- Size: 188*148*60mm
- Pattern adjustment: hd/analog;
- Suitable for: logistics trucks, vans, buses, taxis, cars and so on;
- Video storage: support 2pcs 128 GB memory card;
- Video storage: maximum support 1TB/2 TB hard disk.
- Working voltage: 9V-36V;
- Communication function: supports 3G/4G WIFI/GPS, and other functions; Recording video images;
- Support: 4 channel /8 channel change automatically.



UNIQUE FEATURE

- Support HD/AHD monitor and CCD/CMOS/AHD camera.
- Support configuration function of reverse mirror image.
- Built-in super capacitor, to avoid data loss and disk damage because of abnormal power off.
- Support management identification of intelligent power, low power and shut down automatically, turn off and low power consumption.



BY-08909M
(4Channels / 8 Channels)



Wired connection



Working Temperature



Audio



Shockproof



12-24V

HD 3 QUAD & AHD 2QUAD Monitor

NEW



HD 3 QUAD MONITOR

- Aspect ratio 16:9 image
- Resolution: 1024(H) × RGB × 310(V)
- 3 videos, 1 audio optional
- Power supply: DC 12V~24V
- System: PAL & NTSC auto-switching

AHD 2 QUAD MONITOR WITH DVR

- 12.3 inch 8:3 IPS screen
- Resolution: 1920(H) × RGB × 720(V)
- 2 videos, 1 audio optional
- Power supply: DC12~24V
- System: PAL & NTSC auto-switching



BY-08377MQ



BY-08512AHD (MQ)

Patent Number: ZL 2018 3 0509015.X



Wired connection



Working Temperature



Audio



Shockproof



12/24V

Camera

NEW



WATERPROOF AHD CAMERA

CMOS

AHD 720P/1080P


- Type: rear view camera
- Sensor: CMOS
- Resolution: 1280(H) × 720(V)
- TV lines: AHD 1000 lines

- Lens: LED red light
- Min illumination: 0.00001 lux/F1.2 (LED on)
- Night vision distance: 25ft

- Waterproof: IP69K
- Viewing angle: 150°
- Power supply: DC12V
- Operation temperature: -20°C ~ +70°C



BY-02065AHD




BY-08003G

BY-08003H



BY-02032



BY-08003E



BY-08003F



**BUS REAR CAMERA
BY-02105**



Reversing Shutter Camera

NEW





Specification

- Camera IP rating: IP69K
- Camera type: 1/3 CMOS
- Mirror function: Optional
- Audio function: Optional
- Resolution: PAL:733(H)×493(V)
NTSC:733(H)×493(V)

- Mount: metal bracket mount
- Volts: 12V
- Night vision: 10m
- Viewing angle camera: 120°
- Working temperature: -20°C ~ +70°C
- Camera size: 83×76.25×59.97mm
- Certification: CE, EMC, RoHS, R10, UKCA

CMOS

AHD 720P/1080P



up



down



BY-02000



up



down



BY-02001



up



down



BY-02003

(with automatical shutter & mirror function)



Wired Reversing Camera with Mirror Function

NEW



Specification

- Camera IP rating: IP69K
- Camera type: 1/3 CMOS
- Mirror function: Yes
- Volts: 12V
- Audio function: Optional
- Resolution: PAL:733(H)×493(V)
NTSC:733(H)×493(V)
- Mount: metal bracket mount
- Night vision: 10m
- Viewing angle camera: 120°
- Working temperature: -20°C ~ +70°C
- Camera size: 76×71×88mm
- Certification: CE, EMC, RoHS, R10, UKCA

CMOS

AHD 720P/1080P





BY-02031



BY-02039

Mirror function

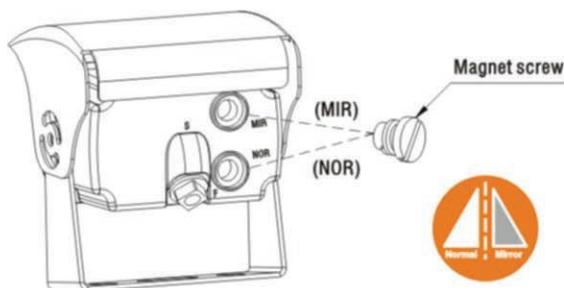

Camera

NEW



WATER-PROOF CAMERA

- Type: Rear view camera
- Sensor: CMOS
- Resolution:
PAL: 733(H)×493(V)
NTSC: 733(H)×493(V)

- TV line: 600
- Lens: 2.5mm
- Min illumination: 0lux (LED on)
- Night vision distance: 25ft
- Waterproof: IP69K

- View angel: 120°
- Power voltage: 12V
- Operation Temp.:
-20°C~+70°C

CMOS

AHD 720P/1080P



BY-02025



BY-02042



BY-02030



BY-02032



BY-02033



BY-02035



BY-02076



BY-02065AHD



BY-02031



BY-02001



BY-02041



**BUS REAR CAMERA
BY-02105**



Camera



WATER-PROOF CAMERA

- Type: Rear view camera
- Sensor: CMOS
- Resolution:
PAL: 733(H)×493(V)
NTSC: 733(H)×493(V)

- TV line: 600
- Lens: 2.5mm
- Min illumination: 0lux (LED on)
- Night vision distance: 25ft
- Waterproof: IP69K

- View angel: 120°
- Power voltage: 12V
- Operation Temp.:
-20°C~+70°C

CMOS

AHD 720P/1080P



BY-02063



BY-02055



BY-02056



BY-02036



BY-02068



BY-02071



BY-02072



BY-02045



BY-02060



BY-02061



BY-02062



BY-02064



BY-02040



BY-02026



BY-02050



BY-02052



Camera



WATER-PROOF CAMERA

- Type: Rear view camera
- Sensor: CMOS
- Resolution:
PAL: 733(H)×493(V)
NTSC: 733(H)×493(V)

- TV line: 600
- Lens: 2.5mm
- Min illumination: 0lux (LED on)
- Night vision distance: 25ft
- Waterproof: IP69K

- View angle: 120°
- Power voltage: 12V
- Operation Temp.:
-20°C~+70°C

CMOS

AHD 720P/1080P



BY-02069



BY-02004



BY-02185



BY-02018



BY-02019



BY-02013P



BY-02014



BY-02011



FIAT DUCATO
BY-02104



BUS REAR CAMERA
BY-02101



FORD
BY-02102



BENZ SPRINTER
2007-2014
BY-02103



Accessories

Accessories

BRACKET

BY-08003



A



C



D

EXTENDED CABLE

- 5/10/15/20 meter extended cable
- 4PIN male connector for camera

- Waterproof function
- Length selectable

BY-08002A



BY-08002B



BY-08002C



5M/10M/15M/20M

TRAILER CABLE

- 5PIN metal connector with male and female connector
- Waterproof function
- 4PIN metal connector for CMOS camera

- Length selectable
- With elasticity length from 2000mm to 4000mm
- Very tight connection and long time reliable



BY-08001-1C



BY-08001-2C



BY-08001-4C



GUANGZHOU BESYO AUTO PARTS CO., LTD

ADD:1208,the twelveth floor,Xiangyun Building,NO.1400 Baiyun Avenue,
Baiyun district,Guangzhou.China 510440

Tel:86-20-28276982 28276981 Fax:86-20-28276983

E-mail: besyo@vip.163.com info@besyoautoparts.com

Web:www.besyoautoparts.com

WhatsApp/We chat: +86 13500013570



Company Wechat Code



Besyo Website Code



R10

IP69K